

KNAPHEIDE®

SINCE 1848

30J Crane Bodies



* Body shown with optional equipment.

Standard Features

- Rugged 14 gauge two-sided A-40 galvanized steel body shell
- Crane compartment is reinforced to support up to a 30,000 ft-lb. crane
- Torsion box understructure design strengthens floor to resist flexing
- Compartment tops and backs (cargo area) have 1/8" tread plate overlays to withstand jobsite abuse
- Knapheide's exclusive "return flange" floor design provides support for side compartments, adds floor strength and eliminates a rust-prone exposed seam between floor and side compartments
- Double panel doors with internal reinforcements for superior rigidity and sound dampening
- Thick automotive bulb-type neoprene door seals protect compartment contents from the outside elements
- All stainless steel continuous hinges for security and paddle-activated, rotary style latches for durability
- Interior light guards to protect your lights from cargo abuse
- 250lb. capacity adjustable divider shelves
- Complete immersion in Knapheide's electrodeposition prime paint system for superior corrosion resistance

Specifications

Model	Max Crane Rating	Dimensions						
		CA	Body Length Nominal	Body Height	Body Width	Compartment Depth	Floor Width	Net Weight (lbs.)
6132DL-30J	30,000 ft-lbs.	84"	132"	40"	94"	20"	54"	2,201
6132DLR-30J	30,000 ft-lbs.	84"	132"	40"	94"	20"	54"	2,269

Options




Steel Mechanic Drawers



Aluminum Mechanic Drawers



LED S/T/T Lights

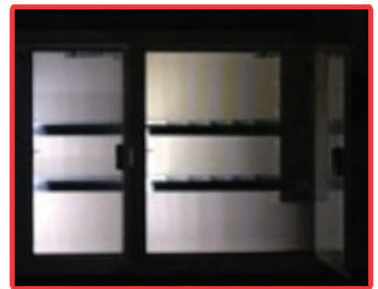

LED Compartment Lighting

The Knapheide Manufacturing Company
1848 Westphalia Strasse
Quincy, Illinois 62305

(217) 222-7131

www.knapheide.com


knapheide@knapheide.com



SINCE 1848

Copyright© 2011 The Knapheide Manufacturing Company

For more information:

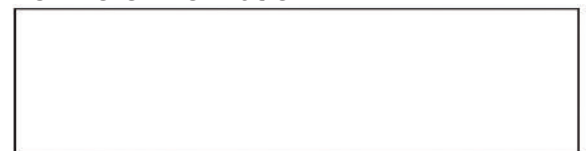

Specifications subject to change without notice.
Some models shown with optional equipment.